

1

2

3

4

5

6

E

D

C

B

A

E


D

C

B

A


INTERIOR LIGHTING FIXTURE SCHEDULE																										
TYPE	DESCRIPTION	BASIS OF DESIGN (NOTE 1)		APPROVED EQUAL(S) (NOTE 2)		LIGHT SOURCE CHARACTERISTICS/PERFORMANCE										BALLAST / DRIVER		EMERGENCY OPTION	INPUT VA	INPUT VOLTAGE	NOMINAL DIMENSIONS			DIAMETER (INCHES)	MOUNTING	REMARKS
		MANUFACTURER	SERIES	MANUFACTURER	SERIES	QTY	WATTAGE	TYPE	DELIVERED LUMENS	CCT	CRI (MIN)	LPM (MM)	LUMEN MAINTENANCE (NOTE 3)		QTY	TYPE	LENGTH (INCHES)				WIDTH (INCHES)	DEPTH (INCHES)				
													L-RATING	HOURS												
SS14	14'-0" INDIRECT/DIRECT LED LUMINAIRE WITH BOOSTED UPLIGHT OUTPUT AND HIGH DOWNLIGHT OUTPUT. UPLIGHT SHALL HAVE WIDESPREAD OPTIC. DOWNLIGHT SHALL HAVE BOTTOM GLOW DIFFUSER. SINGLE CIRCUIT CIRCUITING WITH DIE-FORMED 20-GAUGE COLD-ROLLED STEEL REFLECTORS WITH HIGH REFLECTANCE MATTE WHITE POWDER COAT PAINT AND FROST WHITE SNAP-IN LENS. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR.	FINELITE	HP-2 ID	LITECONTROL NEO-RAY LUXILUMINAIRE HE WILLIAMS PAL LIGHTING MARK	MOD2 ID DEFINE 2 EOS 2.0 MX2UD MLS2-ID S2LD	--	--	LED	16,156	3500K	80	102	L90	100,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	159.6	120-277VAC	188	2-1/4	4-3/4	--	SUSPENDED, AIRCRAFT CABLE	NOTE 7	
SS18	18'-0" INDIRECT/DIRECT LED LUMINAIRE WITH BOOSTED UPLIGHT OUTPUT AND HIGH DOWNLIGHT OUTPUT. UPLIGHT SHALL HAVE WIDESPREAD OPTIC. DOWNLIGHT SHALL HAVE BOTTOM GLOW DIFFUSER. SINGLE CIRCUIT CIRCUITING WITH DIE-FORMED 20-GAUGE COLD-ROLLED STEEL REFLECTORS WITH HIGH REFLECTANCE MATTE WHITE POWDER COAT PAINT AND FROST WHITE SNAP-IN LENS. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR.	FINELITE	HP-2 ID	LITECONTROL NEO-RAY LUXILUMINAIRE HE WILLIAMS PAL LIGHTING MARK	MOD2 ID DEFINE 2 EOS 2.0 MX2UD MLS2-ID S2LD	--	--	LED	20,772	3500K	80	102	L90	100,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	205.2	120-277VAC	216	2-1/4	4-3/4	--	SUSPENDED, AIRCRAFT CABLE	NOTE 7	
SS20	20'-0" INDIRECT/DIRECT LED LUMINAIRE WITH BOOSTED UPLIGHT OUTPUT AND HIGH DOWNLIGHT OUTPUT. UPLIGHT SHALL HAVE WIDESPREAD OPTIC. DOWNLIGHT SHALL HAVE BOTTOM GLOW DIFFUSER. SINGLE CIRCUIT CIRCUITING WITH DIE-FORMED 20-GAUGE COLD-ROLLED STEEL REFLECTORS WITH HIGH REFLECTANCE MATTE WHITE POWDER COAT PAINT AND FROST WHITE SNAP-IN LENS. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR.	FINELITE	HP-2 ID	LITECONTROL NEO-RAY LUXILUMINAIRE HE WILLIAMS PAL LIGHTING MARK	MOD2 ID DEFINE 2 EOS 2.0 MX2UD MLS2-ID S2LD	--	--	LED	23,080	3500K	80	102	L90	100,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	228	120-277VAC	240	2-1/4	4-3/4	--	SUSPENDED, AIRCRAFT CABLE	NOTE 7	
TT	DECORATIVE 6" ILLUMINATED LED PENDANT WITH INTEGRAL RECESSED DOWNLIGHT WITH MEDIUM OPTIC. WHITE MATTE ACRYLIC DIFFUSER WITH ALUMINUM CONSTRUCTION.	SPI	PAVO	SAL BARBICAN DELRAY G LIGHTING SOLERA	CYCLA6 HPC E300 SONEY SRBP	--	--	LED	8,562	3500K	80	118	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	97	120-277VAC	72	--	--	6	SUSPENDED, AIRCRAFT CABLE	NOTE 7	
UU	DECORATIVE 12" ILLUMINATED LED PENDANT WITH INTEGRAL RECESSED DOWNLIGHT WITH WIDE OPTIC. WHITE MATTE ACRYLIC DIFFUSER WITH ALUMINUM CONSTRUCTION.	SPI	PAVO	SAL BARBICAN DELRAY G LIGHTING SOLERA	CYCLA12 HPC E300 SONEY SRBP	--	--	LED	13,388	3500K	80	70	L80	60,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	134	120-277VAC	96	--	--	12	SUSPENDED, AIRCRAFT CABLE	NOTE 7	
VV3	3" LINEAR SURFACE MOUNT LED WALL SCONCE WITH 2" CYLINDRICAL FORM. FULLY ILLUMINATED WITH NO HOUSING AND ROUND, WHITE MATTE ACRYLIC DIFFUSER. 4.3" SQUARE JUNCTION BOX COVER WITH REMOTE POWER SUPPLY.	SPI	PAVO 2" WALL			--	--	LED	2,148	3500K	80	107	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	20	120-277VAC	36	2	2-1/2	--	SURFACE, WALL		
WW	1'-0" X 4'-0" RECESSED LINEAR WITH FLUSH ALUMINUM DOOR AND A19 LENS PATTERN. HOUSING FORMED FROM COLD-ROLLED STEEL WITH EXTRUDED ALUMINUM DOOR FRAME.	LITHONIA	GTL4	POLYMER METALUX HE WILLIAMS VISCOR	CP LED 50 LRTA	--	--	LED	3,211	3500K	80	107	L90	60,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	30	120-277VAC	48	12	4-1/2	--	RECESSED, GWB CEILING		
XX	(NOT USED)																									
YY2	2" LINEAR RECESSED VERTICAL LED LUMINAIRE. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	700	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	19.6	120-277VAC	24	4	1.16	--	RECESSED, WALL	NOTES 11,14	
YY4	4" LINEAR RECESSED VERTICAL LED LUMINAIRE. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	1,400	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	39.2	120-277VAC	48	4	1.16	--	RECESSED, WALL	NOTES 11,14	
YY8	8" LINEAR RECESSED VERTICAL LED LUMINAIRE. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	2,800	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	78.4	120-277VAC	96	4	1.16	--	RECESSED, WALL	NOTES 11,14	
ZZ	CUSTOM LINEAR RECESSED VERTICAL/HORIZONTAL LED LUMINAIRE WITH EXTERNALLY LIT CORNERS. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	2,800	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	78.4	120-277VAC	SEE ARCH	4	1.16	--	RECESSED, WALL	NOTES 11,14	
AAA	CUSTOM LINEAR RECESSED VERTICAL/HORIZONTAL LED LUMINAIRE WITH EXTERNALLY LIT CORNERS. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	1,400	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	39.2	120-277VAC	SEE ARCH	4	1.16	--	RECESSED, WALL	NOTES 11,14	
BBB	CUSTOM LINEAR RECESSED VERTICAL/HORIZONTAL LED LUMINAIRE WITH EXTERNALLY LIT CORNERS. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	2,100	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	58.8	120-277VAC	SEE ARCH	4	1.16	--	RECESSED, WALL	NOTES 11,14	
CCC	CUSTOM LINEAR RECESSED VERTICAL/HORIZONTAL LED LUMINAIRE WITH EXTERNALLY LIT CORNERS. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	2,800	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	78.4	120-277VAC	SEE ARCH	4	1.16	--	RECESSED, WALL	NOTES 11,14	
DDD	CUSTOM LINEAR RECESSED VERTICAL/HORIZONTAL LED LUMINAIRE WITH EXTERNALLY LIT CORNERS. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	2,800	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	78.4	120-277VAC	SEE ARCH	4	1.16	--	RECESSED, WALL	NOTES 11,14	
EEE	(NOT USED)																									
FFF	CUSTOM LINEAR RECESSED VERTICAL/HORIZONTAL LED LUMINAIRE WITH EXTERNALLY LIT CORNERS. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	2,100	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	58.8	120-277VAC	SEE ARCH	4	1.16	--	RECESSED, WALL	NOTES 11,14	
GGG	CUSTOM LINEAR RECESSED VERTICAL/HORIZONTAL LED LUMINAIRE WITH EXTERNALLY LIT CORNERS. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	1,400	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	39.2	120-277VAC	SEE ARCH	4	1.16	--	RECESSED, WALL	NOTES 11,14	
HHH	CUSTOM LINEAR RECESSED VERTICAL/HORIZONTAL LED LUMINAIRE WITH EXTERNALLY LIT CORNERS. CONTINUOUS SEAMLESS LENS WITH LED PANELS REPLACED THROUGH LENS OPENING. NO SPECIAL FRAMING REQUIRED. ARCHITECT TO SELECT FINISH FROM MANUFACTURER FULL RANGE, INCLUDING RAL PAINT COLOR. HOUSING SHALL BE ALLOWED TO BE FIELD CUT FOR EXACT FIT.	DADO	SIMPLELINE	PRECISE LIGHTING AXIS PURE EDGE	ZELITE BEAM 4 TL1A	--	--	LED	3,500	3500K	85	35	L70	50,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	98	120-277VAC	SEE ARCH	4	1.16	--	RECESSED, WALL	NOTES 11,14	
III	(NOT USED)																									
JJJ	16" ROUND HIGH BAY LED LUMINAIRE. DIE-CAST ALUMINUM HOUSING PENDANT MOUNTED FROM CORD WITH HOOK/LOOP PLUG. WITH MEDIUM LUMEN OUTPUT. ANODIZED ALUMINUM SHIELDING. WHITE FULL CAGE WIRE GUARD.	HUBBELL	UTB2	LITHONIA METALUX DAYBRITE	JCBL RH8 RBX	--	--	LED	18,846	3500K	80	148	L80	60,000	--	0-10V DIMMING LED DRIVER, 10% MIN	NONE	128	120VAC	--	--	20	16	SUSPENDED, HOOK WITH CORD AND PLUG	NOTES 7,12	
KKK	(NOT USED)																									
LLL12	12'-0" DIRECT LED LUMINAIRE WITH BOOSTED LUMEN OUTPUT. DIE-FORMED 20-GAUGE COLD-ROLLED STEEL REFLECTORS WITH HIGH REFLECTANCE MATTE WHITE POWDER COAT PAINT AND FROST WHITE SNAP-IN LENS. FLUSH DIFFUSER WITH SPACKLE FLANGE.	FINELITE	HP-2 R	LITECONTROL AXIS PAL LIGHTING LUXILUMINAIRE NEO-RAY MARK	MOD 2 BEAM2 MLR2 EOS 2.0 DEFINE 2 S2LS	--	--	LED	7,668	3500K	80	90	L90	100,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	85.2	120-277VAC	144	2-1/4	4	--	RECESSED, GWB CEILING		
MMM	4'-0" RECESSED LINEAR LED LUMINAIRE WITH WET LOCATION LISTING. BOOSTED LUMEN OUTPUT. IK10 IMPACT PROTECTION.	FINELITE	HP-4 WL R	LITECONTROL AXIS FALSAFE ALUM METALUMEN PAL LIGHTING	FSN6 3SRW RAL4000 ML3VL65-D	--	--	LED	1,779	3500K	80	100	L90	100,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	18.4	277VAC	48	4	4	--	RECESSED, METAL SOFFIT		
NNN	RECESSED WALL MOUNT 10" DIE-CAST ALUMINUM STEP LIGHT WITH GRILL FACEPLATE. BLACK FINISH.	HE WILLIAMS	S10	AMERLUX VISTA SOLERA	PASSO RT MODEL 1505 SCSL	--	--	LED	271	3000K	85	15	L70	70,000	--	0-10V DIMMING LED DRIVER, 1% MIN	NONE	14	277VAC	10	5	3.5	--	SURFACE, WALL		
OOO	(NOT USED)																									



ABHA
architects

1621 N. Lincoln Street
Wilmington, DE 19806
(P) 302.658.6426
(F) 302.658.8431
abhagen@ABHA.com
www.ABHA.com

- CONSULTANTS
- Davis Bowen & Friedel, Inc.
Civil Engineer
 - Piltown Engineering
Structural Engineer
 - Activitas, Inc.
Landscape Architect
 - GIPE Associates
MEP Engineer
 - Stages
Theater & Acoustic Consultant
 - Corsi Associates
Food Service Consultant

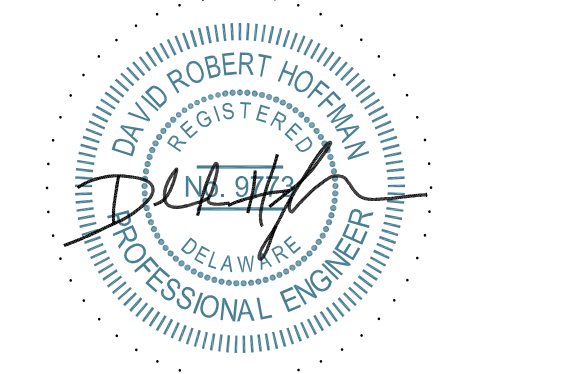

PROJECT
NEW MIDDLE SCHOOL

910 SHIELDS AVENUE
LEWES, DE 19958

OWNER
**CAPE HENLOPEN
SCHOOL DISTRICT**

1270 KINGS HWY
LEWES, DE 19585

KEYPLAN

2	11/30/2022	ASI-017
1	05/17/2022	CONFORMANCE SET

MARK	DATE	DESCRIPTION
PROJ. NUMBER:	2020-14	
FILE NAME:	CHMS_Arch_v2020.rvt	
DRAWN BY:	MPV	
CHECKED BY:	CDH	

The professional services of ABHA Architects, Inc. are undertaken for and performed in the interest of Cape Henlopen School District. No contractual obligation is assumed by ABHA Architects, Inc. for the benefit of any other person involved in the project.

These documents are owned by ABHA Architects, Inc. and shall not be used without written permission. Copyright ABHA Architects, Inc. © 2022

SHEET TITLE
**SCHEDULES –
ELECTRICAL**

E-516